

ELEVATOR GENERAL DATA	
ELEVATOR DESIGNATION	CAR PE-1
CITY ID NUMBER	TBD
TYPE	PASSENGER
LOADING CLASSIFICATION	CLASS A
CAPACITY	3500 LB
SPEED	200 FPM
TRAVEL	53'-0"
FLOORS SERVED	*1,-5 ROOF
OPENINGS FRONT	6
OPENINGS REAR	N/A
OPENINGS SIDE	N/A
ROPING	2:1 S.W.
CONTROL	VVVF-AC
FIRE SERVICE	PHASE 1 & 2

ESTIMATED WEIGHTS		
CAPACITY	3500	LB.
CAR SLING	935	LB.
SAFETY	400	LB.
GUIDE SHOES & PLATES	175	LB.
PLATFORM	635	LB.
ISOLATION	350	LB.
CAB ENCLOSURE & DOOR & INTERIOR	2200	LB.
DOOR OPERATOR	220	LB.
BALANCE WEIGHT	150	LB.
MISCELLANEOUS	500	LB.
TOTAL CAR	5565	LB.
COUNTERWEIGHT FRAME	900	LB.
FILLER WEIGHTS	6415	LB.
TOTAL COUNTERWEIGHT (CTBL 50%)	7315	LB.
HOIST ROPES	215	LB.
COMPENSATION	N/A	LB.
TRAVELING CABLE	180	LB.
TOTAL SUSPENDED LOAD	16775	LB.
MACHINE & BASE, DEF, ETC.	2500	LB.

CAR & HALL FIXTURES	
C.O.P.	MAIN ONLY
CAR LANTERN	2 PER CAR
COMMUNICATION	ADA AUDIO & VISUAL
CAR POSITION INDICATOR	DIGITAL IN C.O.P.
LOBBY POSITION INDICATOR	ADJACENT TO ENTRANCE
HALL STATIONS	STANDARD WITH PI AT ALL FLOORS (EX. LOBBY)
HALL LANTERNS	N/A
ACCESS SWITCHES	TOP & BOTTOM
FIRE SERVICE SW.	AT *1
COMMUNICATION LOSS	AT *1

LIFTREX

PHONE: 877-543-8739

HOISTWAY EQUIPMENT		
GUIDE RAILS	CAR	15 LB/FT (STEEL)
	COUNTERWEIGHT	8 LB/FT (STEEL)
SAFETY	CAR	HW #480
	COUNTERWEIGHT	N/A
GUIDE SHOES	CAR	HW #378
	COUNTERWEIGHT	HW #377
BUFFERS/STROKE	CAR	HW #400-55 / 5"
	COUNTERWEIGHT	HW #400-55 / 5"
GOVERNORS/TRIP SPEED	CAR	HW#207 280 FPM
	COUNTERWEIGHT	N/A
SHEAVES	CAR	(2) 15.75"
	COUNTERWEIGHT	15.75"
OVERHEAD SHEAVES	CAR	N/A
	COUNTERWEIGHT	N/A
LIMIT SWITCHES	BY ESI (CAM OPERATED)	
SUSPENSION MEANS	HOIST	8X10MM (8X19FC 1180/1770)
	GOVERNOR	¾" (8X19 T.S.)
COMPENSATION	SHEAVE	N/A
	WHISPERFLEX	N/A
LEVELLING	PERFORATED STEEL TAPE	

CAR FRAME CONSTRUCTION	
CAR FRAME	
RAIL LOCK	N/A
CROSSHEAD	C6 X 8.2
STILES	C8 X 11.5
SAFETY PLANK	C10 X 15.3
SHEAVE MOUNTING	C10 X15.3
CORNER POST BRACE	N/A
PLATFORM	
THICKNESS	6" (C5/C6/MC6)
SUBFLOOR	2X ¾" MARINE PLYWOOD
PLATFORM ISOLATION	RUBBER ISO & L4X4X½
FINISHED FLOOR	1 ¼" THICK ALLOWANCE
TOE GUARD	48"
DOOR SIZE & TYPE	
FRONT	3'-6" X 7'-0" SS RH
REAR	N/A
OPERATOR	GAL MOVFR II
REOPENING DEVICE	3D INFRARED

PROJECT NOTES	

PROJECT ADDRESS		DRAWING TITLE:		GOVERNING CODE:	DRAWING NO. VT - 001
41 NORTH ST, BRONX NY 10486		GENERAL DATA		ALL WORK TO COMPLY WITH ASME A17.1-2013 AS MODIFIED BY CH. K1 OF APPENDIX K & CH. 30 OF 2022 NYC BUILDING CODE. ALL ACCEPTANCE TESTS TO BE PERFORMED IN THE PRESENCE OF A WITNESSING ELEVATOR AGENCY AS PER INDUSTRY NOTICE DATED 5/28/2025.	
JOB NUMBER:	00-0000	DRAWING DATE:		DRAWING SCALE:	N.A.

LIFTREX

PURCHASER MUST PROVIDE THE FOLLOWING, IN ACCORDANCE WITH ASME A17.1 & NYC BUILDING CODE

- MACHINE ROOM & CONTROL SPACES
- A MACHINE ROOM PROPERLY LIGHTED AND VENTILATED PER CODE WITH TEMPERATURE MAINTAINED 65-95°F. DOOR OF SIZE TO PERMIT ACCESS FOR HYDRAULIC UNIT, TO BE SELF CLOSING AND LOCKING, BUT OPENABLE FROM INSIDE WITHOUT KEY.
 - PROVIDE ADEQUATE STRUCTURAL SUPPORT FOR ALL ELEVATOR EQUIPMENT, MACHINE BEAMS, HITCH PLATES, ETC. REFER TO THE LAYOUT DRAWINGS FOR REACTION FORCES AND EQUIPMENT WEIGHTS.
 - PROVIDE AND MAINTAIN CLEAR ACCESS SPACE FOR ALL ELEVATOR EQUIPMENT, AS PER MANUFACTURER REQUIREMENTS.
 - PROVIDE A FIRE EXTINGUISHER IN ALL MACHINE ROOMS AND CONTROL SPACES.
 - MACHINE ROOM ENCLOSURE, PENETRATIONS, AND ACCESS DOORS TO MEET REQUIRED FIRE RATING.
- HOISTWAY & PIT
- A CLEAR HOISTWAY OF THE DIMENSIONS SHOWN, PLUMB WITHIN 1". SIZE SHOWN IS PER ARCHITECTURAL AND STRUCTURAL DRAWINGS PROVIDED. ANY OUT OF PLUMB CONDITION MUST NOT ENCROACH ON HOISTWAY SIZE FROM TOP TO BOTTOM.
 - SHAFTWAY VENTILATION AS REQUIRED BY CODE.
 - A DRY PIT, REINFORCED TO SUPPORT VERTICAL LOADS SHOWN.
 - A PIT LADDER (FOR EACH ELEVATOR) OF NON-COMBUSTIBLE MATERIAL, CONSTRUCTED AND INSTALLED IN ACCORDANCE WITH CODE, AND EXTENDING FROM PIT FLOOR TO 48" ABOVE LOWEST LANDING SILL.
 - ADEQUATE SUPPORT FOR GUIDE RAIL BRACKETS, TO SUPPORT HORIZONTAL LOADS PROVIDED. SUPPORT LOCATIONS NOT TO EXCEED SPACING AS REQUIRED BY CODE, AND AS SHOWN (SEE RAIL ELEVATION). IF REQUIRED SPACING IS EXCEEDED, ADDITIONAL SUPPORTS MUST BE PROVIDED AT PURCHASER'S EXPENSE.
 - GUIDE RAIL SUPPORT LOCATIONS MUST BE STEEL, BRICK, CONCRETE OR FILLED CONCRETE BLOCK. INSERTS, IF USED, ARE INSTALLED BY OTHERS, IN LOCATIONS SHOWN AS WALLS ARE ERECTED. IF RAIL BRACKETS ARE ATTACHED TO STEEL BEAMS, FIRE-PROOFING IS TO BE APPLIED AFTER RAIL BRACKETS ARE INSTALLED. IF BRACKETS ARE TO ATTACH TO STEEL, ATTACHMENT SURFACE MUST BE FLUSH WITH CLEAR HOISTWAY OR GC MUST ADVISE DISTANCE. BRACKETS REQUIRE 8" VERTICAL SPACE. MASONRY INSERTS ARE TO BE INSTALLED FLUSH (RECESSED). MASONRY INSERTS ARE ASSUMED UNLESS OTHERWISE NOTED.
 - PROJECTIONS OR RECESSES IN THE HOISTWAY OF 2" OR MORE, ON SIDES NOT USED FOR LOADING/UNLOADING SHALL BE BEVELED AT AN ANGLE NOT LESS THAN 75° FROM HORIZONTAL.
 - PERMANENT PROVISIONS SHALL BE MADE TO PREVENT ACCUMULATION OF WATER IN THE HOISTWAY/PIT (SUMP PUMP/DRAIN).
 - A HOIST BEAM SHALL BE FURNISHED & INSTALLED AT THE TOP OF THE HOISTWAY, LOCATED ON C/L OF CAR AND GUIDES. MINIMUM LIFTING CAPACITY SHALL BE 10000 LBS PER CAR.
 - ENTRANCE WALLS ACCEPTING PASSENGER TYPE ENTRANCES ARE TO BE ERECTED (OR ROUGH OPENING FILLED) AFTER DOOR FRAMES AND SILLS ARE INSTALLED.
 - SILL SUPPORT BY GC AND RECESS, AS SHOWN, FULL WIDTH OF HOISTWAY, GROUTED BY OTHERS AFTER DOOR SILLS ARE INSTALLED.
 - IF BODILY ACCESS TO GOVERNOR FROM INSIDE HOISTWAY IS PROHIBITED BY LOCAL AHJ, A 24" X 24" MAX. ACCESS DOOR ADJACENT TO THE GOVERNOR MUST BE PROVIDED. IF GOVERNOR IS TO BE PIT MOUNTED, PRIOR APPROVAL SHOULD BE RECEIVED FROM AHJ.
 - REQUIRED SLEEVES IN HOISTWAY WALL, OR ANY TRENCHING AND FILLING, FOR WIRING DUCT, ETC. FOR EACH ELEVATOR, AS SHOWN.
 - ANY CUTTING AND PATCHING OF BUILDING CONSTRUCTION REQUIRED TO INSTALL SIGNAL FIXTURES, OR OTHER DEVICES, AND ANY REPAIRS, GROUTING, PATCHING OR PAINTING MADE NECESSARY BY SAME.
 - BARRICADES AS MAY BE REQUIRED DURING CONSTRUCTION.
- ELECTRICAL - AS PER ASME, NEC & NFPA
- A FUSED DISCONNECT SWITCH FOR EACH ELEVATOR, OF AMPLE CAPACITY, WITH WIRING TO THE ELEVATOR MOTOR STARTER CONTROL. DISCONNECTING MEANS SHALL DISCONNECT THE NORMAL & EMERGENCY POWER SUPPLY, WHEN PROVIDED.
 - LIGHT AND SWITCH IN ELEVATOR MACHINE ROOM, WITH SWITCH LOCATED ADJACENT TO ACCESS DOOR. CONVENIENCE OUTLET IN MACHINE ROOM.
 - LIGHT, SWITCH AND CONVENIENCE OUTLET IN ELEVATOR PIT. LIGHT SWITCH SHALL BE ACCESSIBLE FROM LOWER LANDING OPENING. INSTALL DEVICES WITH CLEARANCE FROM ELEVATOR COMPONENTS.
 - HEAT AND PRODUCT OF COMBUSTION SENSORS LOCATED IN EACH ELEVATOR LOBBY WITH NECESSARY WIRING TO ELEVATOR CONTROL PANEL, WHEN FIRE SERVICE IS SPECIFIED.
 - TELEPHONE AND/OR WIRING FROM BUILDING SOURCE TO ELEVATOR CONTROL PANEL.
 - FURNISHING OF ANY SPECIAL INTERCOM, PAGING, OR TELEVISION SYSTEMS, INCLUDING WIRING FROM BUILDING SOURCE TO ELEVATOR CONTROL PANEL.
 - HOISTWAY IS ASSUMED NOT TO BE SPRINKLED - GC MUST ADVISE OTHERWISE. IF SPRINKLERS ARE PRESENT IN THE MACHINE ROOM OR HOISTWAY, A MEANS SHALL BE PROVIDED (BY OTHERS) TO AUTOMATICALLY DISCONNECT THE MAIN LINE POWER SUPPLY TO THE ELEVATOR BEFORE THE APPLICATION OF WATER.
 - IF ELEVATOR IS EQUIPPED WITH BATTERY EMERGENCY LOWERING, AND AUX. CONTACT IS REQUIRED ON MAIN POWER DISCONNECT IN MACHINE ROOM. THESE CONTACTS (BY OTHERS) SHALL BE U.L. APPROVED AND LOCATED IN DISCONNECT.
- GENERAL
- NECESSARY POWER FOR INSTALLING, ERECTING AND TESTING, WITHOUT CHARGE.
 - ANY FEATURES OR EQUIPMENT REQUIRED, BUT NOT SPECIFICALLY IDENTIFIED AS BEING FURNISHED BY ELEVATOR CONTRACTOR.
 - PROVIDE PENETRATIONS AND CUTOUTS FOR ELEVATOR EQUIPMENT (E.G. PIPING, VENTILATION, FIXTURES, ETC.) AS REQUIRED. PERFORM PATCHING, PAINTING, AND GROUTING OF WALLS, CEILINGS, DOORS, ETC. AS NECESSARY.
 - PROVIDE ADEQUATE LIGHTING AND SWITCHES IN THE MACHINE ROOM, PIT, AND EQUIPMENT SPACES AS REQUIRED BY CODE.
 - ALL 125V/15 OR 20A/SINGLE PHASE OUTLETS IN THE MACHINE ROOM, PIT, AND EQUIPMENT SPACES ARE TO BE GFCI TYPE.
 - PROVIDE (1) DEDICATED TELEPHONE LINE PER ELEVATOR, TERMINATING AT THE ELEVATOR CONTROLLER.

MACHINE ROOM & DATA EQUIPMENT	
MACHINE TYPE	IMPERIAL GEARLESS 478
DRIVE SHEAVE DIAMETER	15.75"
DEFLECTOR SHEAVE DIAMETER	N/A
MACHINE BEAMS	(2) MC12 X 31 - A992
HITCH BEAMS	CAR-(2)C10X15.3 CWT-(2) C8 X 11.5
CONTROLLER	ESI
POWER SUPPLY	208V 3PH 60HZ

ENTRANCES	
HOISTWAY ENTRANCE TYPE/SIZE	3'-6" X 7'-0" SS RH
HOISTWAY DOOR HANGER/TRACKS	GAL
HOISTWAY DOOR INTERLOCKS	GAL
HOISTWAY DOOR CLOSERS	GAL

PLOT PLAN




SEAL & SIGNATURE



IT IS A VIOLATION OF THE LAW FOR ANY PERSON, UNLESS ACTING UNDER THE DIRECTION OF THE LICENSED ENGINEER, TO ALTER THIS DOCUMENT IN ANY WAY. IF A DOCUMENT BEARING THE ENGINEERING SEAL OF THE LICENSED ENGINEER IS ALTERED, THE ALTERING ENGINEER SHALL AFFIX TO THEIR DOCUMENT THEIR SEAL, AND THE NOTATION "ALTERED BY" FOLLOWED BY THEIR SIGNATURE, AND THE DATE OF SUCH ALTERATION, AND A SPECIFIC DESCRIPTION OF THE ALTERATION.

NO.	BY	ISSUE OR REVISION	DATE
0	BF	CONSTRUCTION RELEASE	5/6/26
1	BF	CHANGED LADDER LOCATION CHANGED SUPPORT FOR MACHINE BEAMS	5/14/26
2	BF	CHANGED ELEVATIONS	5/20/26
3			

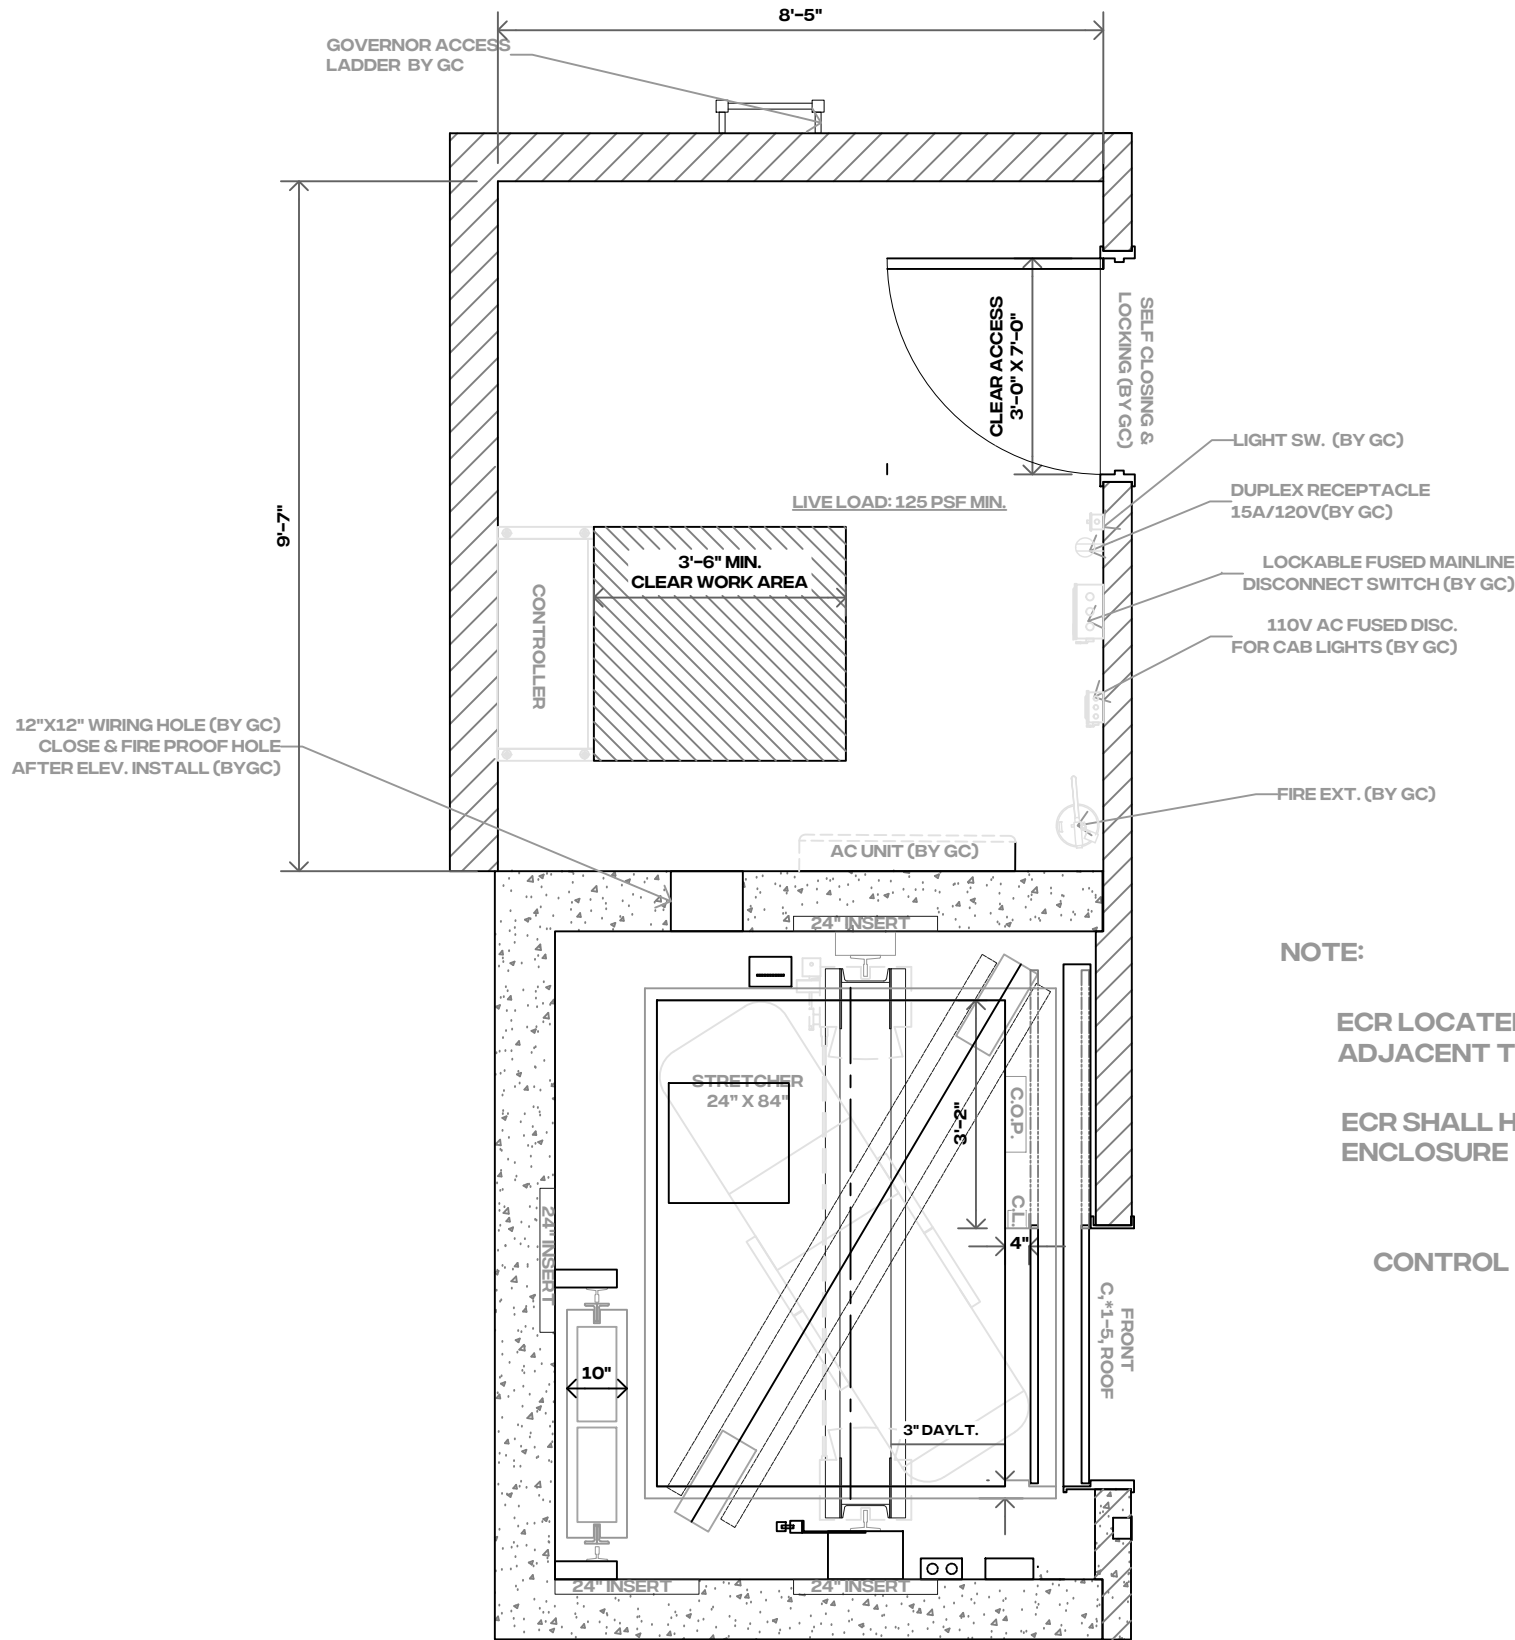

NOTE:

ECR LOCATED AT ROOF IMMEDIATELY ADJACENT TO

ECR SHALL HAVE AT LEAST 2 HR FIRE RATED ENCLOSURE

CONTROL ROOM AT ROOF .

SEAL & SIGNATURE

PRELIMINARY

IT IS A VIOLATION OF THE LAW FOR ANY PERSON, UNLESS ACTING UNDER THE DIRECTION OF THE LICENSED ENGINEER, TO ALTER THIS DOCUMENT IN ANY WAY. IF A DOCUMENT BEARING THE ENGINEERING SEAL OF THE LICENSED ENGINEER IS ALTERED, THE ALTERING ENGINEER SHALL AFFIX TO THEIR DOCUMENT THEIR SEAL, AND THE NOTATION "ALTERED BY" FOLLOWED BY THEIR SIGNATURE, AND THE DATE OF SUCH ALTERATION, AND A SPECIFIC DESCRIPTION OF THE ALTERATION.

LIFTREX

PHONE: 877-543-8739

PROJECT ADDRESS	
41 NORTH ST, BRONX NY 10486	
JOB NUMBER:	00-0000

DRAWING TITLE:	
CONTROLLER ROOM PLAN (AT ROOF)	
DRAWING DATE:	


GOVERNING CODE:	
ALL WORK TO COMPLY WITH ASME A17.1-2013 AS MODIFIED BY CH. K1 OF APPENDIX K & CH. 30 OF 2022 NYC BUILDING CODE. ALL ACCEPTANCE TESTS TO BE PERFORMED IN THE PRESENCE OF A WITNESSING ELEVATOR AGENCY AS PER INDUSTRY NOTICE DATED 5/28/2025.	
DRAWING SCALE:	3/8" = 1'-0"

DRAWING NO.	
VT - 002	
SHEET NUMBER:	
2 OF 5	

NO.	BY	ISSUE OR REVISION	DATE
0	BF	CONSTRUCTION RELEASE	5/6/26
1	BF	CHANGED LADDER LOCATION CHANGED SUPPORT FOR MACHINE BEAMS	5/14/26
2	BF	CHANGED ELEVATIONS	5/20/26
3			

NOTE:
ALL POCKETS TO BE FILLED WITH
NON-SHRINK GROUT TO TOP OF BEAM
FOLLOWING BEAM INSTALLATIONS, BY GC

CAR PE-1
CAPACITY 3500 LB.
ID #TBD
32.62 SQ.FT

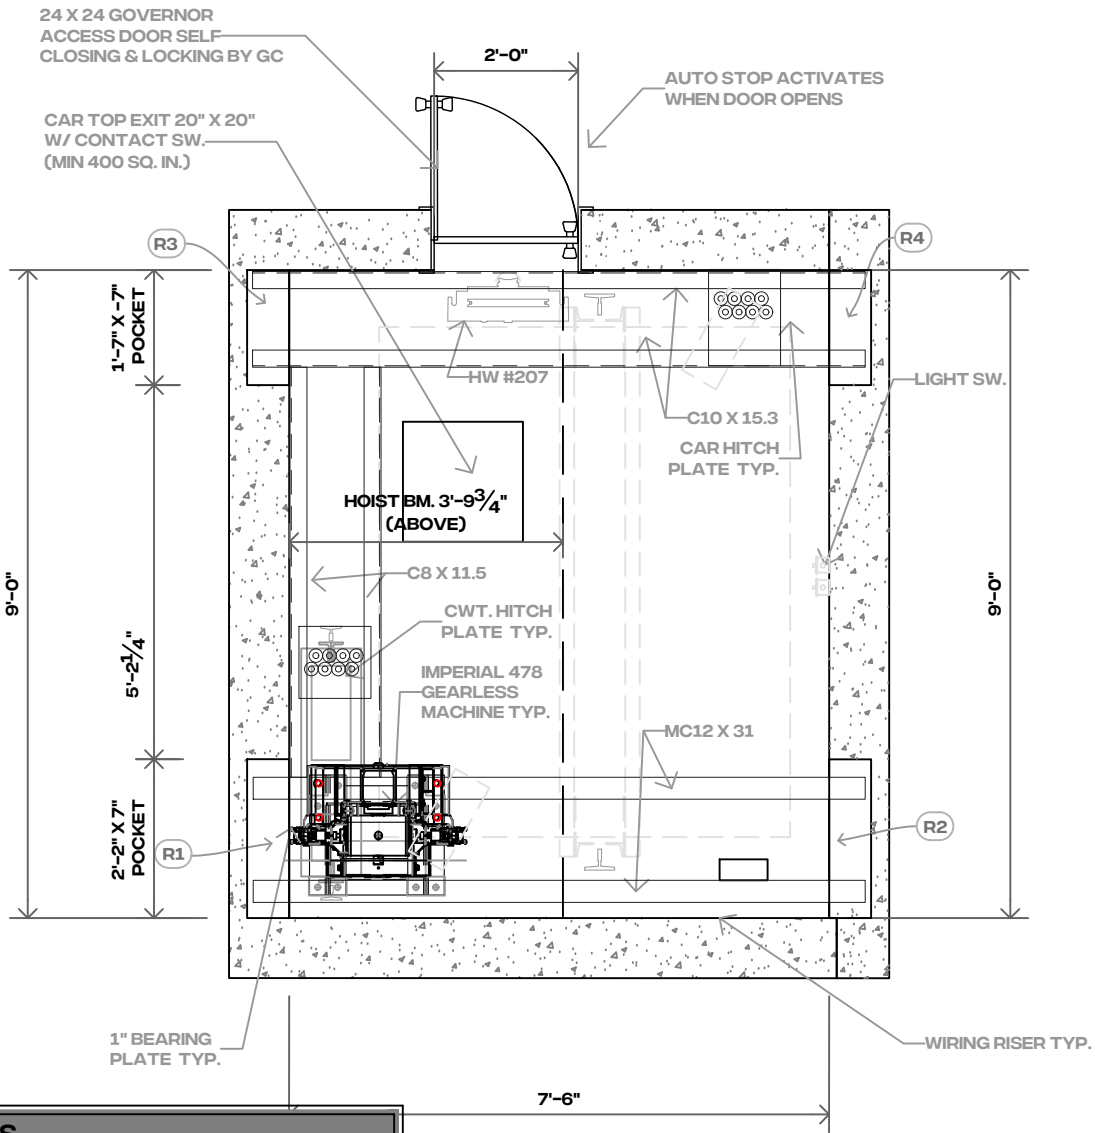

MACHINE BEAM REACTIONS					
ELEVATOR NO.	R1	R2	R3	R4	R5
1	20000	6000	11000	12000	N/A
NOTES. 1. LOADS HAVE BEEN DOUBLED FOR IMPACT. 2. SEE MOTOR ROOM PLAN FOR LOCATIONS. 3. MACHINE BEAMS AND THEIR SUPPORTS NOT TO EXCEED THE MAXIMUM ALLOWABLE DEFLECTION OF $\frac{1}{1666}$ OF THE SPAN UNDER STATIC LOADING.					

SEAL & SIGNATURE

PRELIMINARY

IT IS A VIOLATION OF THE LAW FOR ANY PERSON, UNLESS ACTING UNDER THE DIRECTION OF THE LICENSED ENGINEER, TO ALTER THIS DOCUMENT IN ANY WAY. IF A DOCUMENT BEARING THE ENGINEERING SEAL OF THE LICENSED ENGINEER IS ALTERED, THE ALTERING ENGINEER SHALL AFFIX TO THEIR DOCUMENT THEIR SEAL, AND THE NOTATION "ALTERED BY" FOLLOWED BY THEIR SIGNATURE, AND THE DATE OF SUCH ALTERATION, AND A SPECIFIC DESCRIPTION OF THE ALTERATION.

LIFTREX

PHONE: 877-543-8739


PROJECT ADDRESS	
41 NORTH ST, BRONX NY 10486	
JOB NUMBER:	00-0000

DRAWING TITLE:	
OVERHEAD PLAN	
DRAWING DATE:	

GOVERNING CODE:	
ALL WORK TO COMPLY WITH ASME A17.1-2013 AS MODIFIED BY CH. K1 OF APPENDIX K & CH. 30 OF 2022 NYC BUILDING CODE. ALL ACCEPTANCE TESTS TO BE PERFORMED IN THE PRESENCE OF A WITNESSING ELEVATOR AGENCY AS PER INDUSTRY NOTICE DATED 5/28/2025.	
DRAWING SCALE:	3/8" = 1'-0"



DRAWING NO.	
VT - 003	
SHEET NUMBER:	
3 OF 5	

NO.	BY	ISSUE OR REVISION	DATE
0	BF	CONSTRUCTION RELEASE	5/6/26
1	BF	CHANGED LADDER LOCATION CHANGED SUPPORT FOR MACHINE BEAMS	5/14/26
2	BF	CHANGED ELEVATIONS	5/20/26
3			

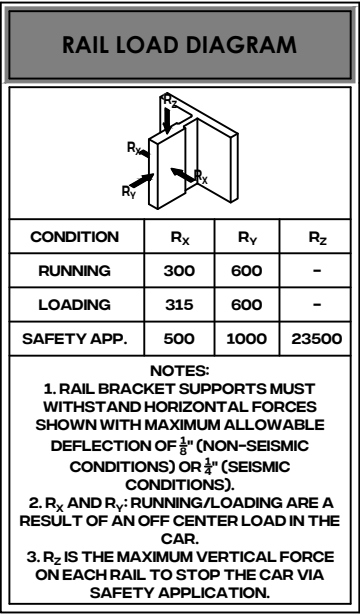

LIFTREX
PHONE: 877-543-8739

PROJECT ADDRESS		DRAWING TITLE:		GOVERNING CODE:		DRAWING NO. VT - 004	NO.	BY	ISSUE OR REVISION	DATE
41 NORTH ST, BRONX NY 10486		TYPICAL SHAFT PLAN		ALL WORK TO COMPLY WITH ASME A17.1-2013 AS MODIFIED BY CH. K1 OF APPENDIX K & CH.30 OF 2022 NYC BUILDING CODE. ALL ACCEPTANCE TESTS TO BE PERFORMED IN THE PRESENCE OF A WITNESSING ELEVATOR AGENCY AS PER INDUSTRY NOTICE DATED 5/28/2025.			0	BF	CONSTRUCTION RELEASE	5/6/26
							1	BF	CHANGED LADDER LOCATION CHANGED SUPPORT FOR MACHINE BEAMS	5/14/26
							SHEET NUMBER:		2	BF
JOB NUMBER:	00-0000	DRAWING DATE:		DRAWING SCALE:	3/8"=1'-0"	4 OF 5	3			

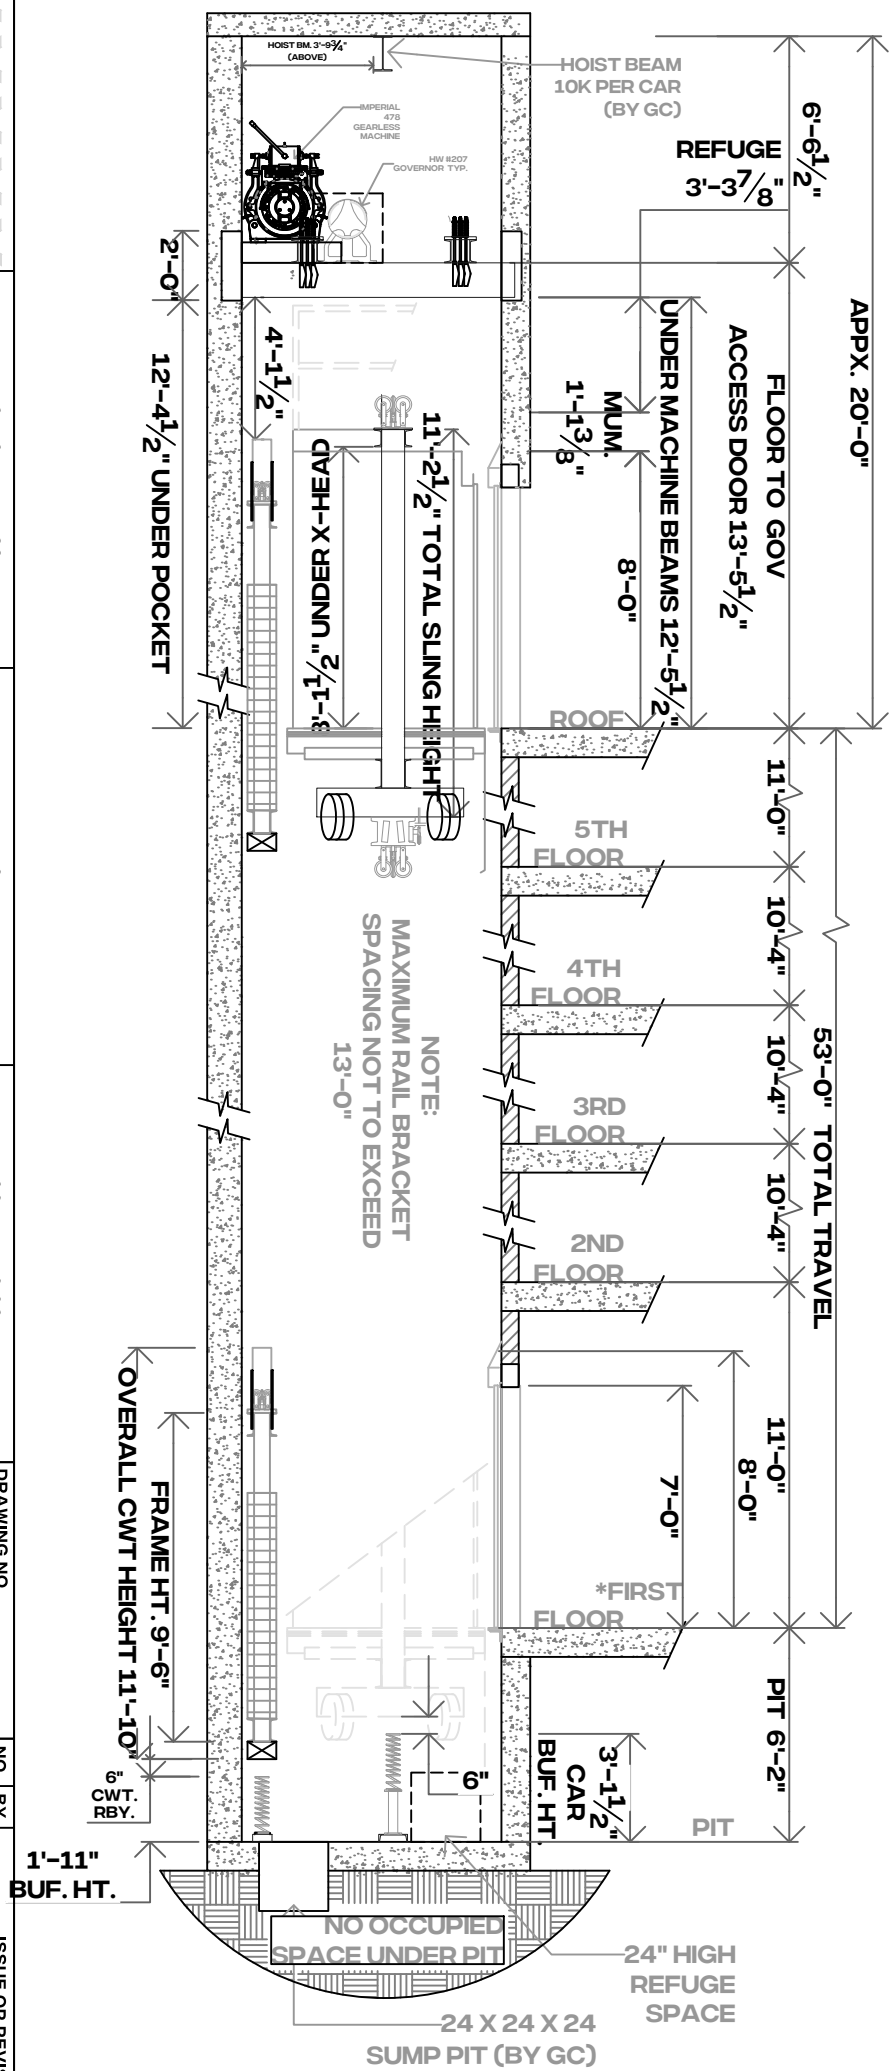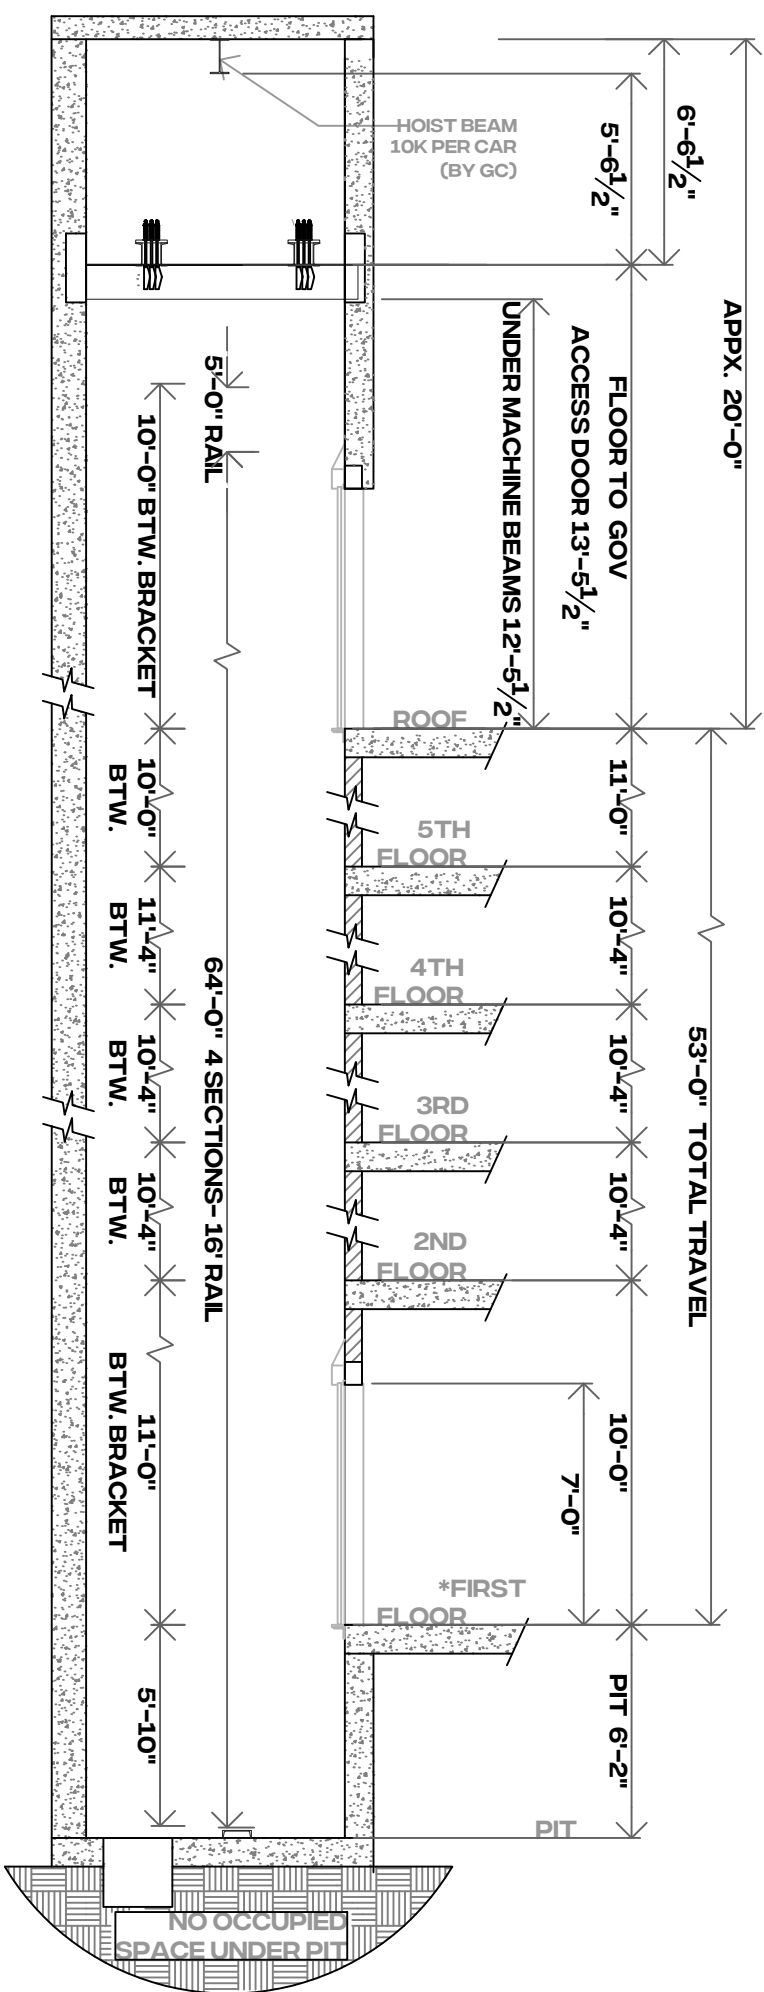

LIFETREE		PROJECT ADDRESS		DRAWING TITLE:		GOVERNING CODE:		DRAWING NO.		NO.		BY		ISSUE OR REVISION		DATE		DIRECTION OF THE LICENSED ENGINEER, TO ALTER THIS DOCUMENT IN ANY WAY, IF A DOCUMENT BEARING THE ENGINEERING SEAL OF THE LICENSED ENGINEERS IS ALTERED, THE ALTERING ENGINEERS SHALL AFFIX TO THEIR DOCUMENT THEIR SEAL, AND THE NOTATION "ALTERED BY" FOLLOWED BY THEIR SIGNATURE, AND THE DATE OF SUCH ALTERATION, AND A SPECIFIC DESCRIPTION OF THE ALTERATION.	
		41 NORTH ST, BRONX NY 10486		ELEVATION PLAN		ALL WORK TO COMPLY WITH ASME A17.1-2013 AS MODIFIED BY CH. K1 OF APPENDIX K & CH. 30 OF 2022 NYC BUILDING CODE. ALL ACCEPTANCE TESTS TO BE PERFORMED IN THE PRESENCE OF A WITNESSING ELEVATOR AGENCY AS PER INDUSTRY NOTICE DATED 5/28/2025.		VT - 006		0		BF		CONSTRUCTION RELEASE		5/6/26			
PHONE: 877-543-8739		JOB NUMBER: 00-0000		DRAWING DATE:		DRAWING SCALE: NOT TO SCALE		SHEET NUMBER: 5 OF 5		1		BF		CHANGED LADDER LOCATION CHANGED SUPPORT FOR MACHINE BEAMS		5/14/26			
										2		BF		CHANGED ELEVATIONS		5/20/26			
										3									